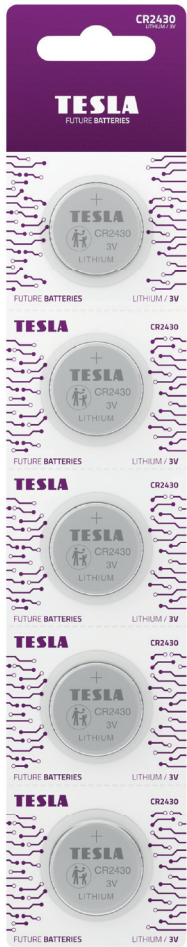


SPECIAL BUTTON CELL LITHIUM - CR2430

**DESCRIPTION:**

Mercury Free Lithium Cell Battery,
CR2430 / Non-Rechargeable

CHEMICAL SYSTEM:

Lithium Manganese Dioxide

SHELF LIFE:

7 years

NOMINAL VOLTAGE:

3 Volts

NOMINAL DIMENSIONS:

Ø 24.5 mm × 3.0 mm

APPLICATIONS:

Suitable for flashlights, car keys, watches,
scanners etc.

STORAGE TEMPERATURE:

+10 °C to + 25 °C

Should be stored in dry and cool place.

NOMINAL WEIGHT:

4 g

CROSS REFERENCES:

TESLA	IEC	JIS	VARTA	DURACELL
CR2430	CR2430	CR2430	CR2430	DL2430

TYPICAL SERVICE LIFE:

DISCHARGE RESISTANCE	DISCHARGE CONDITION	END POINT VOLTAGE	SERVICE LIFE
1.5 kOhms	24 Hrs/Day	2.0V	145 Hrs