



Image may differ from product. See technical specification for details.

## W 6207

### Stainless steel deep groove ball bearing

Stainless steel single row deep groove ball bearings provide greater chemical and corrosion resistance. As with deep groove ball bearings generally, they are particularly versatile, have low friction and are optimized for low noise and low vibration, which enables high rotational speeds. They accommodate radial and axial loads in both directions, are easy to mount, and require less maintenance than many other bearing types.

- Greater chemical and corrosion resistance
- Simple, versatile and robust design
- Low friction and high-speed capability
- Accommodate radial and axial loads in both directions
- Require little maintenance

# Overview

## Dimensions

Bore diameter	35 mm
Outside diameter	72 mm
Width	17 mm

## Properties

Filling slots	Without
Number of rows	1
Locating feature, bearing outer ring	None
Bore type	Cylindrical
Cage	Sheet metal
Matched arrangement	No
Radial internal clearance	CN
Tolerance class	Normal
Material, bearing	Stainless steel
Coating	Without
Sealing	Without
Lubricant	None
Relubrication feature	Without


## Performance

Basic dynamic load rating	22.1 kN
Basic static load rating	15.3 kN
Reference speed	22 000 r/min
Limiting speed	14 000 r/min

## Logistics


Product net weight	0.262 kg
eClass code	23-05-08-01
UNSPSC code	31171504

## Technical specification

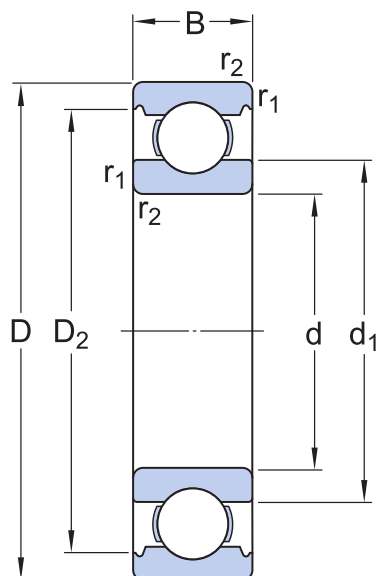

## Dimensions

$d$	35 mm	Bore diameter
$D$	72 mm	Outside diameter
$B$	17 mm	Width
$d_1$	$\approx 47.6$ mm	Shoulder diameter
$D_2$	$\approx 64.83$ mm	Recess diameter
$r_{1,2}$	min. 1.1 mm	Chamfer dimension

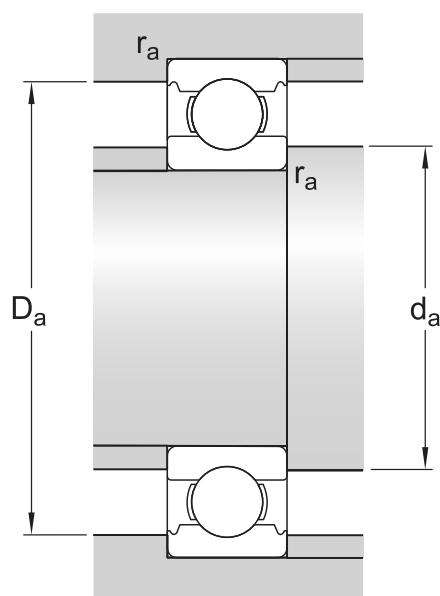

## Abutment dimensions

$d_a$	min. 41.5 mm	Diameter of shaft abutment
$D_a$	max. 65.5 mm	Diameter of housing abutment
$r_a$	max. 1 mm	Radius of shaft or housing fillet

## Calculation data

Basic dynamic load rating	$C$	22.1 kN
Basic static load rating	$C_0$	15.3 kN
Fatigue load limit	$P_u$	0.655 kN
Reference speed		22 000 r/min
Limiting speed		14 000 r/min
Minimum load factor	$k_r$	0.03
Calculation factor	$f_0$	13.9

## Mass

Mass bearing

0.26 kg

# Tolerance class

---

Dimensional tolerances	Normal
Radial run-out	Normal