


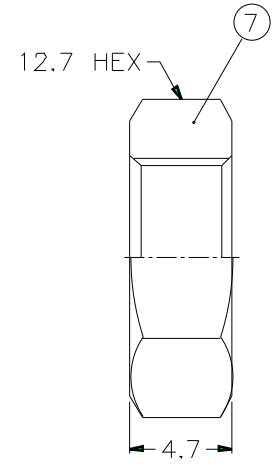


|           |      |                              |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |
|-----------|------|------------------------------|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|
| 1         |      |                              |  |  | 2 |  |  |  |  | 3 |  |  |  |  | 4 |  |  |  |  | 5 |  |  |  |  | 6 |  |  |  |  | 7 |  |  |  |  | 8 |  |  |  |  |
| REVISIONS |      |                              |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |
| ISS       | ZONE | DESCRIPTION\PER REQUEST\DATE |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |

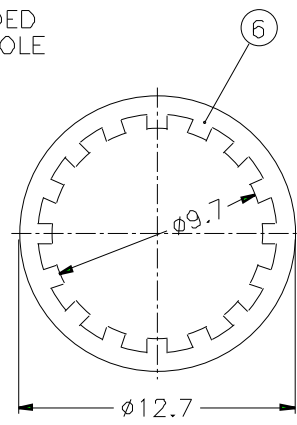

RECOMMENDED MOUNTING HOLE

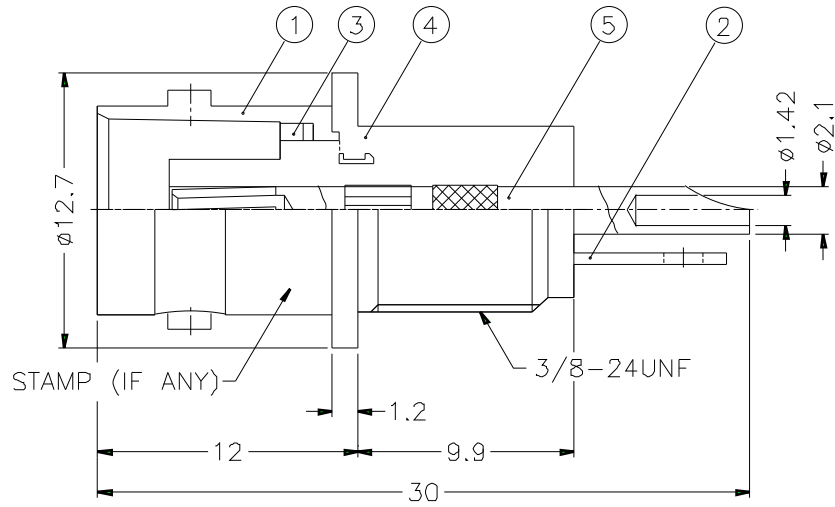

1. MAX. PANEL THICKNESS=3.2mm

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - BRASS PER QQ-B-613
  - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - PHOSPHOR BRONZE PER QQ-B-750
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - BRIGHT TIN PL. 200 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 100 MIN. THICK

RECOMMENDED TORQUE: A MAXIMUM TORQUE OF 12 INCH-LBS MAY BE APPLIED ON HEX NUT WHEN MOUNTING CONNECTOR IN PANEL.

|     |                 |          |        |      |                 |
|-----|-----------------|----------|--------|------|-----------------|
| 7   | HEX NUT         | NOTE 1   | NOTE 3 | 1    | HN127-3/8-24X47 |
| 6   | LOCK WASHER     | NOTE 2   | NOTE 3 | 1    | LW-127/97X05    |
| 5   | CONTACT PIN     | NOTE 4   | NOTE 5 | 1    | B7300-5         |
| 4   | INSULADR        | NYLON    | WHITE  | 1    | B6651B1-1-50-E  |
| 3   | LOCK RING       | NOTE 2   | NOTE 3 | 1    |                 |
| 2   | BRAID GROUNDING | NOTE 2   | NOTE 6 | 1    |                 |
| 1   | BODY            | NOTE 1   | NOTE 3 | 1    |                 |
| NO. | DESCRIPTION     | MATERIAL | FINISH | Q'TY | DRAWING NO.     |

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6 = ±0.2  
6-30 = ±0.4  
30-120 = ±0.6  
120-315 = ±1  
315-1000 = ±1.6  
1000-2000 = ±2.4

|          |                   |
|----------|-------------------|
| PART NO. | B6651B1-NNYL3G-50 |
| APPROVED | DATE 10-11-01'    |
| CHECKED  | DATE 10-11-01'    |
| DRAWN    | DATE 10-11-01'    |
| FILE NO  |                   |

**Amphenol**

TITLE  
BNC BULKHEAD RECEPT. ISOLATED JACK

DRAWING NO.  
KJ-B6651B1-NNYL3G-50

ITEM NO.

|   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |   |  |  |  |  |
|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|
| 1 |  |  |  |  | 2 |  |  |  |  | 3 |  |  |  |  | 4 |  |  |  |  | 5 |  |  |  |  | 6 |  |  |  |  | 7 |  |  |  |  | 8 |  |  |  |  |
|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|---|--|--|--|--|