

| |
|--|
| 0.28 Inch Dual Digit SMD Display |
| OSK2028A-IX (Common Anode type) |
| OSK2028A-LX (Common Cathode type) |

■ **Features**

- 0.28 Inch Two Digit Display
- Long lifetime operation
- IC compatible
- Low power dissipation
- Gray surface & white segment or dot
- RoHS compliant

■ **Applications**

- Counting device
- Clock







■ **Absolute Maximum Rating (Ta=25°C)**

| Item | Symbol | Value | | Unit |
|--|------------------|------------|-------------|------|
| | | B/TG | YG/Y/O/R/RA | |
| DC Forward Current | I _F | 25 | 25 | mA |
| Pulse Forward Current* | I _{FP} | 80 | 80 | mA |
| Reverse Voltage | V _R | 5 | 5 | V |
| Power Dissipation | P _t | 90 | 65 | mW |
| Operating Temperature | T _{opr} | -30~ +85 | | °C |
| Storage Temperature | T _{stg} | -40~ +100 | | °C |
| Lead Soldering Temperature(1.6mm Below body) | T _{sol} | 260°C/3sec | | °C |

Pulse width Max.10ms Duty ratio max 1/10

*Reflow time Max.3seconds

■ **Electrical -Optical Characteristics (Ta=25°C)**

| Part Number | Color | | | V _F (V) | | | I _R (μA) | I _v (mcd) | | | λD(nm) | | |
|-------------------|--------------|----|---|----------------------|------|------|---------------------|----------------------|------|------|----------------------|------|------|
| | | | | Min. | Typ. | Max. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. |
| | | | | I _F =20mA | | | V _R =5V | I _F =10mA | | | I _F =20mA | | |
| OSK2028A-IB(LB) | Blue | B |  | - | 3.1 | 3.6 | 100 | 3 | 9 | 15 | 465 | 470 | 475 |
| OSK2028A-IG(LG) | True green | TG |  | - | 3.1 | 3.6 | 100 | 5 | 10 | 15 | 510 | 520 | 530 |
| OSK2028A-IYG(LYG) | Yellow green | YG |  | - | 2.1 | 2.6 | 100 | 2 | 6 | 10 | 565 | 570 | 575 |
| OSK2028A-IY(LY) | Yellow | Y |  | - | 2.1 | 2.6 | 100 | 2 | 6 | 10 | 585 | 590 | 595 |
| OSK2028A-IO(LO) | Orange | O |  | - | 2.1 | 2.6 | 100 | 2 | 6 | 10 | 600 | 605 | 610 |
| OSK2028A-IR(LR) | Red | R |  | - | 2.1 | 2.6 | 100 | 2 | 6 | 10 | 625 | 630 | 640 |



*1 Tolerance of dominant wavelength is±1nm

*2 Tolerance of luminous intensity is±15%

■ Package dimensions

**OSK2028A-IX
(Common Anode type)**

Note:
1, Unit : mm (Tolerance: ±0.25mm unless otherwise noted)

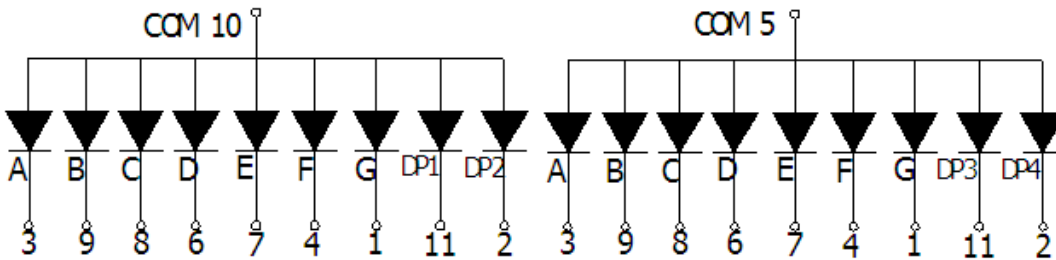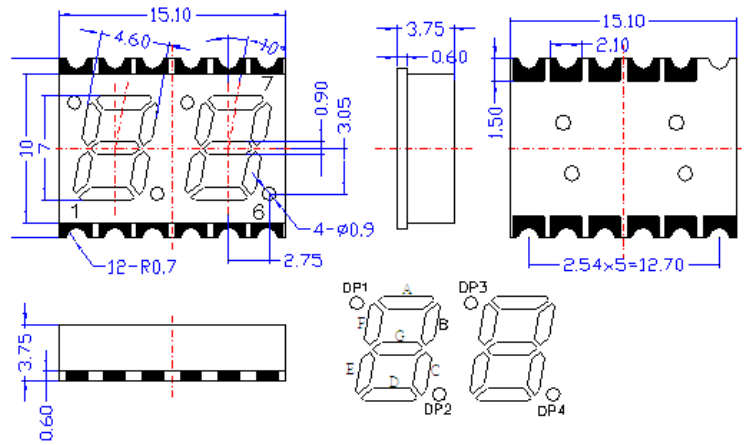

**OSK2028A-LX
(Common Cathode type)**

Note:
1, Unit : mm (Tolerance: ±0.25mm unless otherwise noted)

