


Ninigi

D A T A S H E E T

SIL SOCKETS MACHINE PINS STANDARD 2.54 MM (0.100")

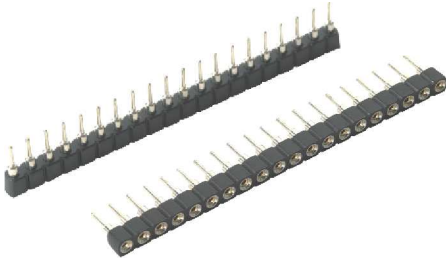

Specification:

Insulator: Thermoplastic (UL94V-0)
Contact: Copper Alloy
Storage Temperature: -20°C ~ 85°C
Operating Temperature: 0°C ~ 70°C
Contact Resistance: 20 mW max. (initial)
Insulation Resistance: 1000 MW min.
Dielectric Withstanding Voltage: 1000 VAC (1 minute)

STS 20P

Row:

P - single
D - double

No. of Contacts:

N = 02...64 - single row
N = 04...80 - double row

SIL Sockets Machine Pins

