


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/20/06'		
B	DRAWING UPDATE	JLZ 11/28/22'		

Positions	DIM A	DIM B
9	30.80	24.99
15	39.14	33.32
25	53.04	47.04

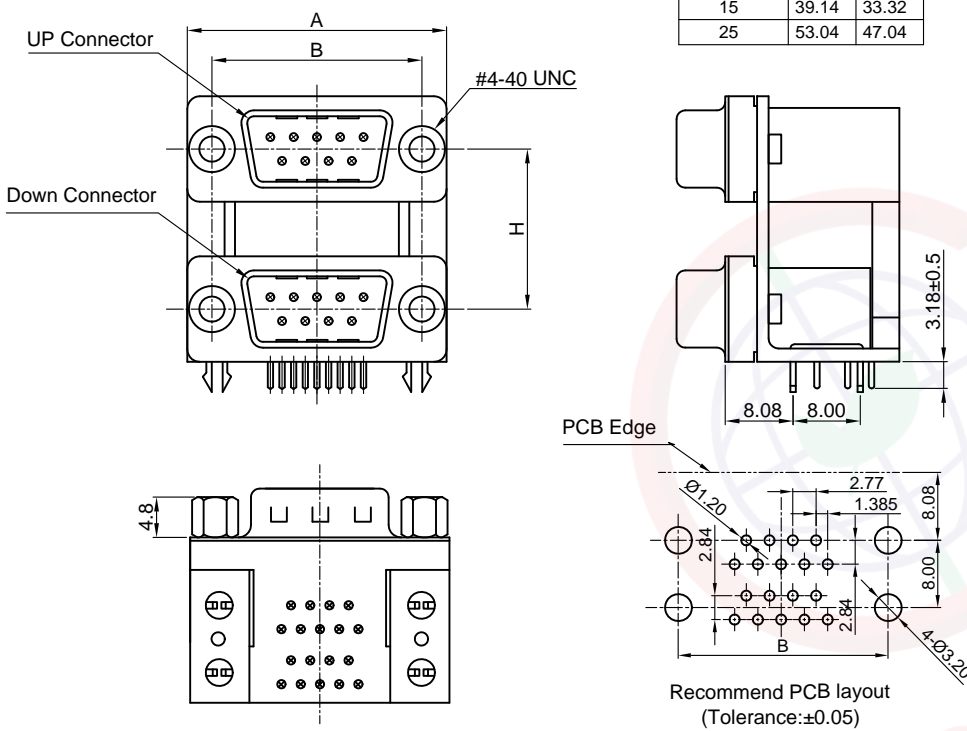

Notes:
 Specifications:
 1. Contact Resistance: 100mΩ Max.
 2. Insulation Resistance: 1000MΩ Min.
 3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 4. Current Rating:3A.
 5. Temperature: -40°C~+105°C.
 Materials:
 1. Contact Material: Copper Alloy.
 2. Shell Material: Steel.
 3. Insulator Material: PBT,Black,UL94-V0.
 4. Board Lock: Copper alloy.
 Product Number Code:
 DS1082-01 - X X X X X X
 Screw type
 1: CC type 2: CS type
 3: BB type 4: BS type
 Central distance(DIM. H)
 1: 19.05mm 2: 15.88mm
 Housing color
 B: Black
 Contact plating
 0: Selective gold flash
 8: Full gold flash
 Up connector type
 9M: D-SUB Standard 9pin Male
 9F: D-SUB Standard 9pin Female
 15M: D-SUB Standard 15pin Male
 15F: D-SUB Standard 15pin Female
 25M: D-SUB Standard 25pin Male
 25F: D-SUB Standard 25pin Female
 Down connector type
 9M: D-SUB Standard 9pin Male
 9F: D-SUB Standard 9pin Female
 15M: D-SUB Standard 15pin Male
 15F: D-SUB Standard 15pin Female
 25M: D-SUB Standard 25pin Male
 25F: D-SUB Standard 25pin Female

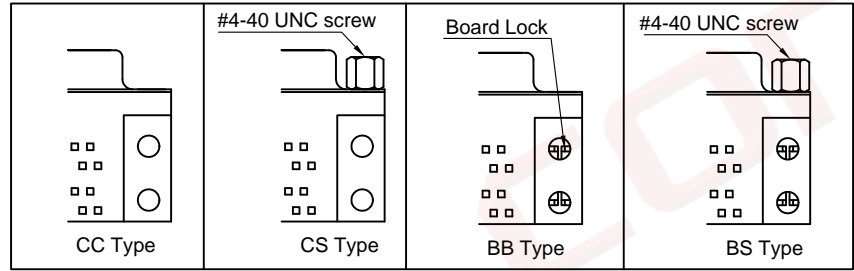

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1082-01-XXXXXX-B		

PROJECTION	TITLE	D-SUB Dual Port Type	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1082-01 SERIES

晨翔电子有限公司
CONNELY ELECTRONIC CO. LTD