

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5600200620](#)
Status: **Active**
Overview: [DuraClik Connector System](#)
Description: DuraClik Wire-to-Board Header, Single Row, Vertical, 6 Circuits, Tin (Sn) Over Nickel, Natural

Documents:

3D Model (PDF)	Product Specification PS-502351-001-001 (PDF)
3D Model	Datasheet (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL E29179

General


Product Family	PCB Headers
Series	560020
Application	Automotive, Signal, Wire-to-Board
Comments	The Operating Temperature Range when used with DuraClik series 502351 is -40°C to +105°C. It is -40°C to 125°C when used with DuraClik ISL series 560123 or TPA series 505151.
Component Type	PCB Header
Overview	DuraClik Connector System
Product Name	DuraClik
Taxonomy	PCB Headers and Receptacles
UPC	887191747323

Physical

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	SC-0
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Resin	Polyamide
Net Weight	0.836/g
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C, -40° to +125°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact 3.0A

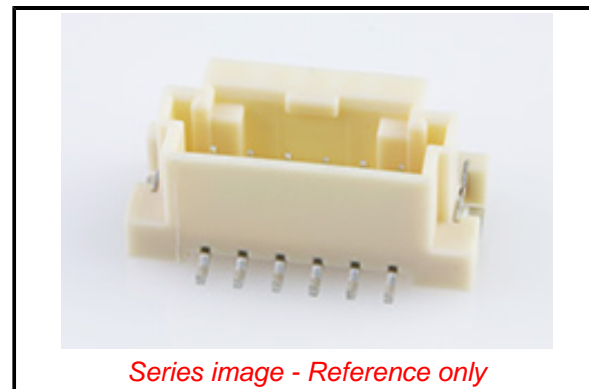

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2022)4187-DC (10 June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

[560020](#) Series

Mates With

DuraClik Crimp Housings [502351](#) , [560123](#) , [505151](#)

Voltage - Maximum 125V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 004

Lead-free Process Capability REFLOW

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 255

Material Info

Reference - Drawing Numbers

Product Specification PS-502351-001-001

Sales Drawing SD-560020-001-001, SD-560020-003-001

This document was generated on 01/17/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION