


	<b>DIN 912</b>	<b>ISO 4762</b>		<b>8.8</b>
---	----------------	-----------------	--	------------

Standard withdrawn

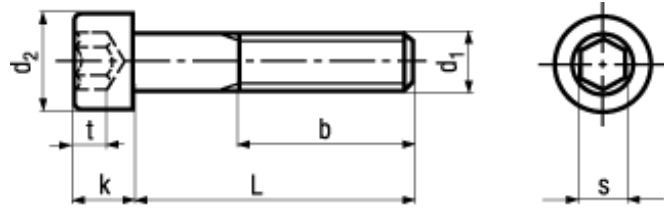

<b>BN 4</b>
<b>Hex socket head cap screws</b>
partially threaded
Steel 8.8
zinc plated blue
<ul style="list-style-type: none"> <li>• ~UNI 5931</li> <li>• ~CSN 021143</li> </ul>

M18: not included in ISO 4762

Article#	d <sub>1</sub>	d <sub>2</sub>	b	k	s	t min.	L
1003860	M3	5,5	18	3	2,5	1,3	25
1003879							30
5503695							35
3055276							40
8211353							45
3166256							50
1004018	M4	7	20	4	3	2	30
1004026							35
1004034							40
5503739							45
3055278							50
5515612							60
3186736							70
3186737							80
1004174	M5	8,5	22	5	4	2,5	30
1004182							35
1004190							40
1004204							45
1004212							50
1004220							55
1004239							60
3092492							65

M18: not included in ISO 4762

Article#	d <sub>1</sub>	d <sub>2</sub>	b	k	s	t min.	L
3055279	M5	8,5	22	5	4	2,5	70
5507452							80
3186740							90
3186741							100
1004387	M6	10	24	6	5	3	35
1004395							40
1004409							45
1004417							50
1004425							55
1004433							60
1004441							65
1004468							70
1004476							(75)
1004484							80
1004492							90
1004506							100
3166257							110
3055282							120
1004662	M8	13	28	8	6	4	40
1004670							45
1004689							50
1004697							55
1004700							60
1004719							65
1004727							70
1004735							(75)
1004743							80
5523190							(85)
1004751							90
1004778							100
1004786							110
1004794							120
3055283							130
3170867							140
3186742							150
5503566							160
1004948	M10	16	32	10	8	5	45
1004956							50
1004964							55
1004972							60
1004980							65

M18: not included in ISO 4762

Article#	d <sub>1</sub>	d <sub>2</sub>	b	k	s	t min.	L
1004999	M10	16	32	10	8	5	70
1005006							(75)
1005014							80
1005022							90
1005030							100
1005049							110
1005057							120
3055286							130
5503577							140
5503581							150
5509814							160
1005189	M12	18	36	12	10	6	55
1005197							60
1005200							65
1005219							70
1005227							(75)
1005235							80
8202397							(85)
1005243							90
1005251							100
1005278							110
1005286							120
5523551							130
1005294							140
1005308							150
1005316							160
5503585							200
1005391	(M14)	21	40	14	12	7	60
1005413							70
1005448							80
1005456							90
1005464							100
1005472							110
1005480							120
1005588	M16	24	44	16	14	8	65
1005596							70
5400310							(75)
1005618							80
1005626							90
1005634							100
1005642							110

M18: not included in ISO 4762

Article#	d <sub>1</sub>	d <sub>2</sub>	b	k	s	t min.	L
1005650	M16	24	44	16	14	8	120
3170872							130
1005669							140
1005677							150
1005685							160
3170874							180
3170876							200
3170878							240
1005758	(M18)	27	48	18	14	9	70
1005766							80
1005774							90
1005782							100
1005804							120
8224579	M20	30	52	20	17	10	75
1005898							80
1005901							90
1005928							100
1005936							110
1005944							120
3235379							130
1005952							140
1005960							150
1005979							160
8264945							200
1006037	M24	36	60	24	19	12	90
1006045							100
1006053							110
1006061							120
1006088							140
1006096							160