



曜凌光電股份有限公司

住址: 42878 台中市大雅区科雅路 25 號 5F WEB: <http://www.Raystar-Optronics.com>
5F., No.25, Keya Rd., Daya Dist., Taichung E-mail: sales@raystar-optronics.com
City 428, Taiwan Tel:886-4-2565-0761 Fax :
886-4-2565-0760

RFF1020Q-1IW-DBS

SPECIFICATION

CUSTOMER:

APPROVED BY	
PCB VERSION	
DATE	

FOR CUSTOMER USE ONLY

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

ISSUED DATE:

Contents

	Page
1. Revision History	3
2. General Specification	4
3. Module Coding System	5
4. Interface Pin Function	6
5. Outline dimension & Block Diagram	8
6. Absolute Maximum Ratings	10
7. Electrical Characteristics	11
8. DC Characteristics	11
9. Interface Timing Characteristics	12
10. Optical Characteristics	14
11. Reliability	16
12. Package Specification	17
13. Initial Code For Reference	19

1. Revision History

DATE	VERSION	REVISED PAGE NO.	Note
2014/2/27	1		First issue

2. General Specification

- Resolution: $800 \times (\text{RGB}) \times 480$
- Module dimension: $235.0 \times 145.8 \times 12.4$ (max.) mm
- Active Area : 222.0×132.48 mm
- Dot pitch: 0.0925×0.276 mm
- LCD type: TFT, Normally White, Transmissive
- View direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Interface: Digital 8080 family MPU
- Backlight Type: LED, Normally White
- Controller IC: SSD1963

*Color tone slight changed by temperature and driving voltage.

3. Module Coding System

R	F	F	102	0Q	-	1	I	W	-	D	B	S
1	2	3	4	5	-	6	7	8	-	9	10	11

Item	Description	
1	R : Raystar Optonics Inc.	
2	Display Type : TFT Type	
3	Solution: A: 128x160 B:320x234 C:320x240 D:480x234 F:800x480	
4	Display Size : 10.2" TFT	
5	Version Code.	
6	Model serials no.	
7	Polarizer Type, Temperature range, View direction	A : Reflective, N.T, 6:00
		K : Transflective, W.T,12:00
		D : Reflective, N.T, 12:00
		1 : Transflective, U.T,6:00
		G : Reflective, W. T, 6:00
		4 : Transflective, U.T.12:00
		J : Reflective, W. T, 12:00
		C : Transmissive, N.T,6:00
		0 : Reflective, U. T, 6:00
8	Backlight	F : Transmissive, N.T,12:00
		3 : Reflective, U. T, 12:00
		I : Transmissive, W. T, 6:00
		B : Transflective, N.T,6:00
		L : Transmissive, W.T,12:00
		E : Transflective, N.T.12:00
		2 : Transmissive, U. T, 6:00
		H : Transflective, W.T,6:00
		5 : Transmissive, U.T,12:00
9	Driver Method	N : Without backlight
		Y : LED, Yellow Green
		P : EL, Blue green
		A : LED, Amber
		T : EL, Green
10	Interface	W : LED, White
		D : EL, White
		O : LED, Orange
		F : CCFL, White
		G : LED, Green
11	TS	D: Digital A: Analog
		N : without control board A : 8Bit B : 16Bit
		N : Without TS S : resistive touch panel
		C : capacitive touch panel

4. Interface Pin Function

4.1. LCM PIN Definition

Pin	Symbol	Function	Remark
1	GND	System ground pin of the IC . Connect to system ground.	
2	VDD	Power Supply : +3.3V	
3	BLE	Backlight control signal , H: On \ L: Off	
4	D/C	Data/Command select	
5	WR	Write strobe signal	
6	RD	Read strobe signal	
7	DB0	Data bus	
8	DB1	Data bus	
9	DB2	Data bus	
10	DB3	Data bus	
11	DB4	Data bus	
12	DB5	Data bus	
13	DB6	Data bus	
14	DB7	Data bus	
15	DB8	Data bus (When select 8bits Mode, this pin is NC)	Note1
16	DB9	Data bus (When select 8bits Mode, this pin is NC)	Note1
17	DB10	Data bus (When select 8bits Mode, this pin is NC)	Note1
18	DB11	Data bus (When select 8bits Mode, this pin is NC)	Note1
19	DB12	Data bus (When select 8bits Mode, this pin is NC)	Note1
20	DB13	Data bus (When select 8bits Mode, this pin is NC)	Note1
21	DB14	Data bus (When select 8bits Mode, this pin is NC)	Note1
22	DB15	Data bus (When select 8bits Mode, this pin is NC)	Note1
23	NC	No connect	
24	NC	No connect	
25	CS	Chip select	
26	RST	Hardware reset	
27	L/R	Left / right selection; Default L/R=H	Note 2,3
28	U/D	Up/down selection; ; Default U/D=L	Note 2,3
29	XL	Left electrode	
30	YU	Top electrode	
31	XR	Right electrode	
32	YD	Bottom electrode	
33	VLED-	Power for LED Driver IC(GND)	
34	VLED-	Power for LED Driver IC(GND)	
35	VLED+	Power for LED Driver IC(+5V)	
36	VLED+	Power for LED Driver IC(+5V)	

Note1: When select 8bit mode, DB0~DB7 be used, DB8~DB15 no connect

When select 16bit mode, DB0~DB15 be used


Note 2: Selection of scanning mode

Setting of scan control input		Scanning direction
U/D	L/R	
GND	VDD	Up to down, left to right
VDD	GND	Down to up, right to left
GND	GND	Up to down, right to left
VDD	VDD	Down to up, left to right


Note 3: Definition of scanning direction.Refer to the figure as below:




U/D=L, L/R=H

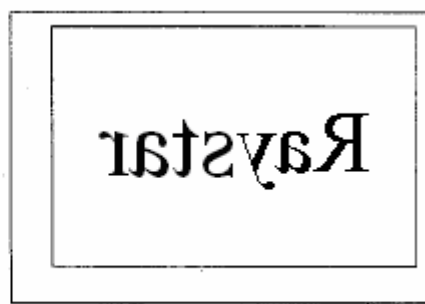

U/D=L, L/R=L


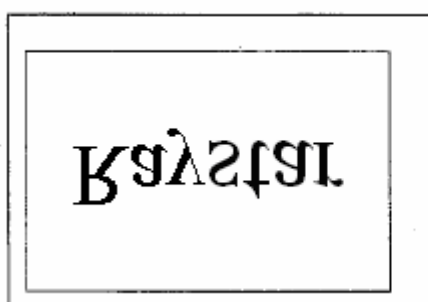


U/D=H, L/R=H

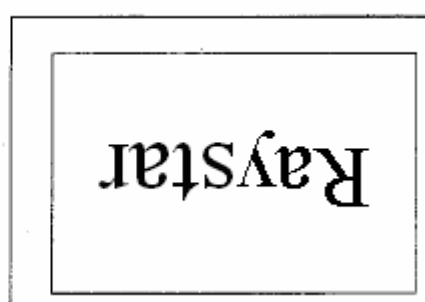


U/D=H, L/R=L


5. Outline Dimension & Block Diagram

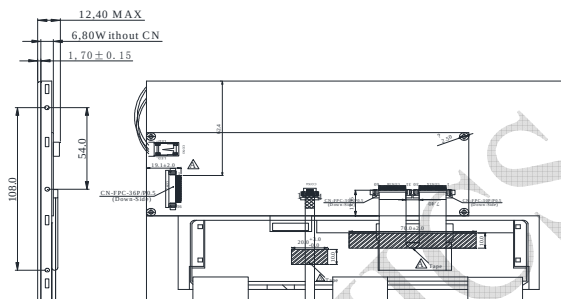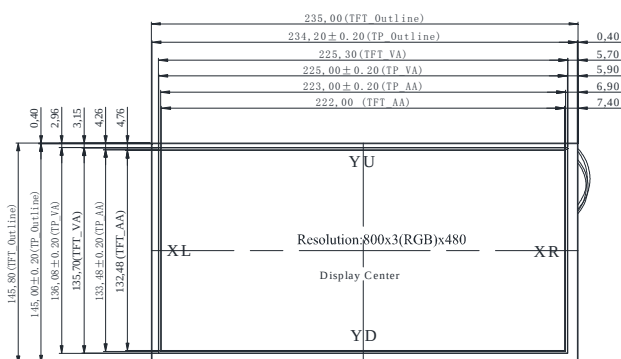

PIN NO.	SYMBOL
1	GND
2	VDD
3	BL_E
4	D/C
5	WR
6	RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	DB8
16	DB9
17	DB10
18	DB11
19	DB12
20	DB13
21	DB14
22	DB15
23	NC
24	NC
25	CS
26	RESET
27	LR
28	UD
29	XL
30	YU
31	XR
32	YD
33	VLED-
34	VLED-
35	VLED+
36	VLED+

The non-specified tolerance of dimension is $\pm 0.3\text{mm}$.



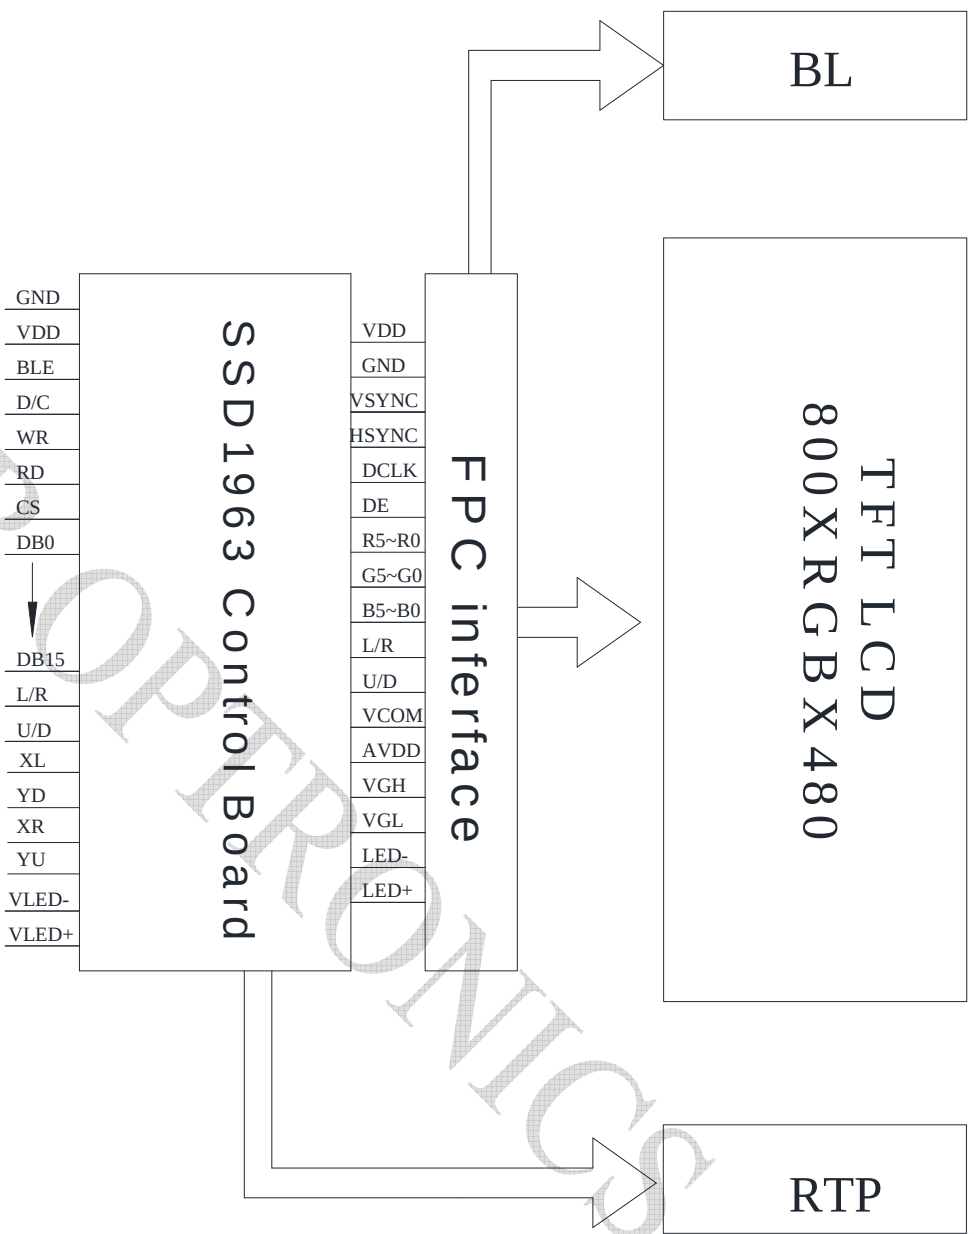


6. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

- Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

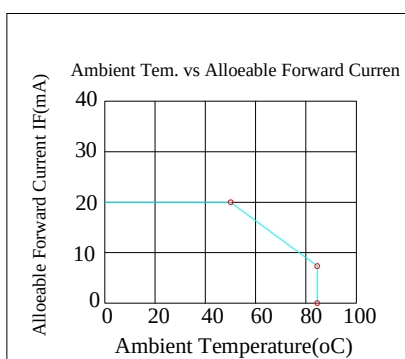

7. Electrical Characteristics

7.1. Operating conditions:

Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
Supply Voltage For LCM	VDD	—	3.0	3.1	3.3	V	—
Supply Current For LCM	IDD	—	—	160	225	mA	Note1

Note 1 : This value is test for VDD=3.3V , Ta=25°C only

7.2. Backlight driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Operation Current For LED Driver	VLED=5V	500	—	750	mA	Note 1,2
Power Consumption	VLED=5V	2500	—	3750	mW	Note 1,2
Supply Voltage For LED Driver	VLED+	—	5	—	V	—
LED Life Time	—	20,000	—	—	Hr	Note 2,3,4

Note 1 : Base on VLED= 5V for the back light driver IC specification

Note 2 : Ta = 25 °C

Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case


8. DC CHARATERISTICS

Parameter	Symbol	Rating			Unit	Condition
		Min	Typ	Max		
Low level input voltage	V _{IL}	0	-	0.3VDD	V	
High level input voltage	V _{IH}	0.7VDD	-	VDD	V	


9.1. 8080 Mode

The 8080 mode MCU interface consist of CS#, D/C#, RD#, WR#, D[23:0] and TE signals (Please refer to Table 6-1 for pin multiplexed with 6800 mode). This interface use WR# to define a write cycle and RD# for read cycle. If the WR# goes low when the CS# signal is low, the data or command will be latched into the system at the rising edge of WR#. Similarly, the read cycle will start when RD# goes low and end at the rising edge of RD#.

Symbol	Parameter	Min	Typ	Max	Unit
fMCLK	System Clock Frequency	1	-	110	MHz
tMCLK	System Clock Period	1/ fMCLK	-	-	ns
tPWCSH	Control Pulse High Width Write Read	13 30	1.5* tMCLK 3.5* tMCLK	-	ns
tPWCSL	Control Pulse Low Width Write (next write cycle) Write (next read cycle) Read	13 80 80	1.5* tMCLK 9* tMCLK 9* tMCLK	-	ns
tAS	Address Setup Time	1	-	-	ns
tAH	Address Hold Time	2	-	-	ns
tDSW	Write Data Setup Time	4			ns
tDHW	Write Data Hold Time	1	-	-	ns
tPWLW	Write Low Time	12			ns
tDHR	Read Data Hold Time	1	-	-	ns
tACC	Access Time	32			ns
tPWLRL	Read Low Time	36	-	-	ns
tR	Rise Time	-		0.5	ns
tF	Fall Time	-	-	0.5	ns
tCS	Chip select setup time	2		-	ns
tCSH	Chip select hold time to read signal	3	-	-	ns

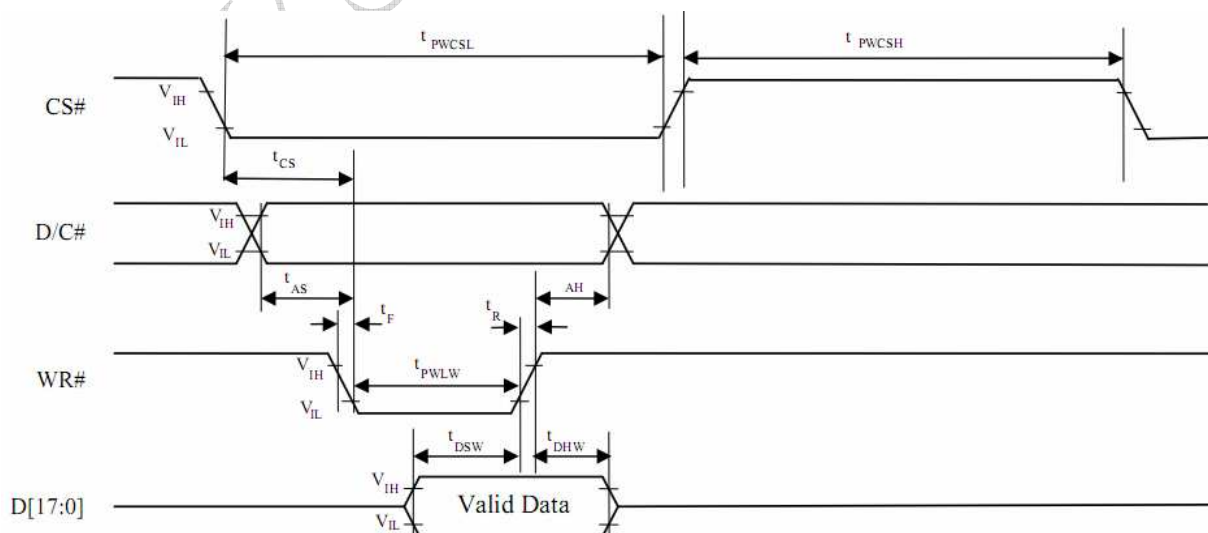

9.4. Parallel 8080-series Interface Timing Diagram(Read Cycle)

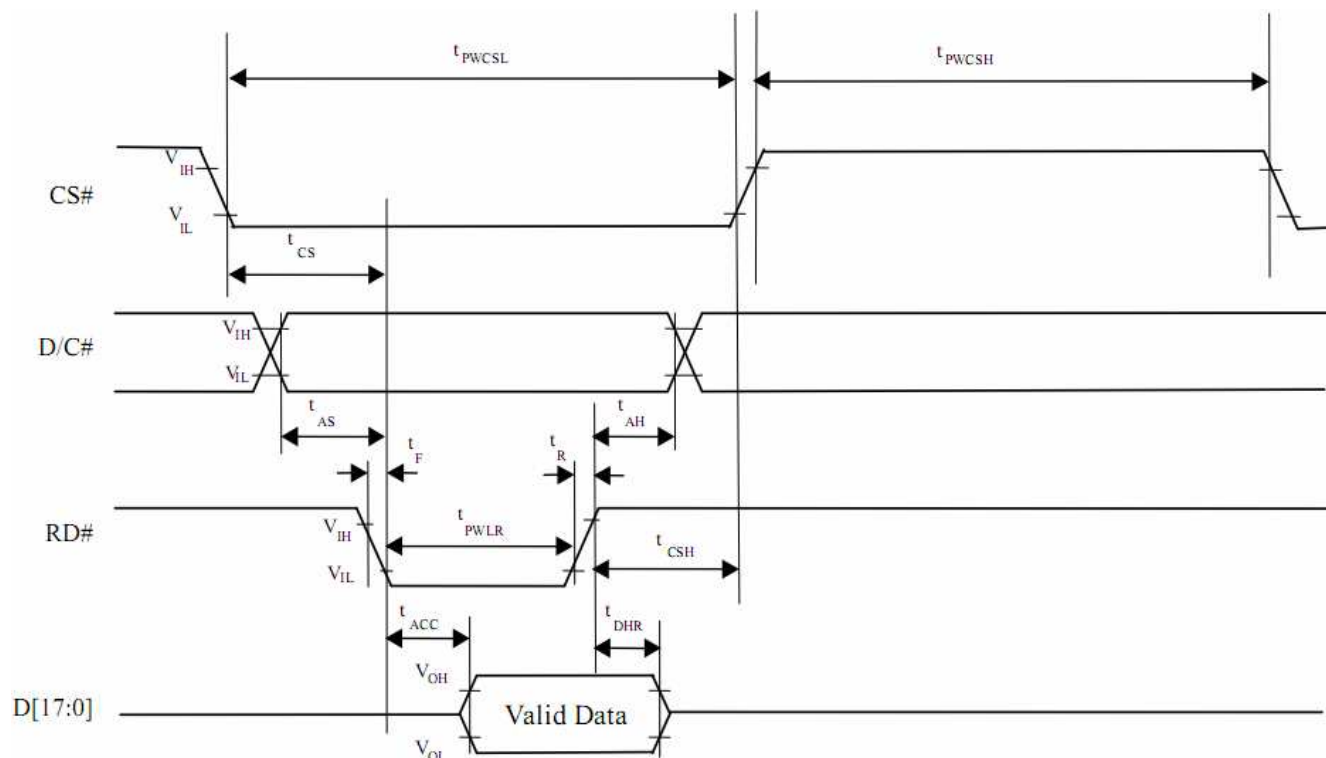

9.5. Pixel Data Format

Interface	Cycle	D[23]	D[22]	D[21]	D[20]	D[19]	D[18]	D[17]	D[16]	D[15]	D[14]	D[13]	D[12]	D[11]	D[10]	D[9]	D[8]	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]
24 bits	1 st	R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
18 bits	1 st							R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
16 bits (565 format)	1 st									R5	R4	R3	R2	R1	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1
16 bits	1 st									R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0
	2 nd									B7	B6	B5	B4	B3	B2	B1	B0	R7	R6	R5	R4	R3	R2	R1	R0
	3 rd									G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
12 bits	1 st													R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4
	2 nd													G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
9 bits	1 st																R5	R4	R3	R2	R1	R0	G5	G4	G3
	2 nd																G2	G1	G0	B5	B4	B3	B2	B1	B0
8 bits	1 st																	R7	R6	R5	R4	R3	R2	R1	R0
	2 nd																	G7	G6	G5	G4	G3	G2	G1	G0
	3 rd																	B7	B6	B5	B4	B3	B2	B1	B0

10. Optical Characteristics

TFT LCD characteristic (Without Capacitive Touch Panel)

Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles	θ_T	$CR \geq 10$	35	45	—	Degree	Note 1
	θ_B		55	65	—		
	θ_L		55	65	—		
	θ_R		55	65	—		
Contrast Ratio	CR	$\theta = 0^\circ$	250	300	—	—	Note 4,5
Response Time	TR	25°C	—	15	30	ms	Note 3,5
	TF		—	20	40		
Chromaticity	White	Backlight is on	0.26	0.31	0.36	—	Note 2,6,7
			0.28	0.33	0.38		
Luminance	L	—	200	250	—	cd/m ²	Center of display

$T_a = 25 \pm 2^\circ\text{C}$, VLED / ILED = 5V / 500mA

Note 1: Definition of viewing angle range

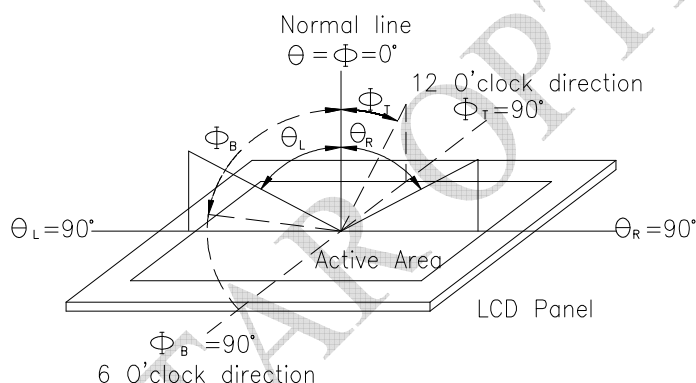


Fig.10.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


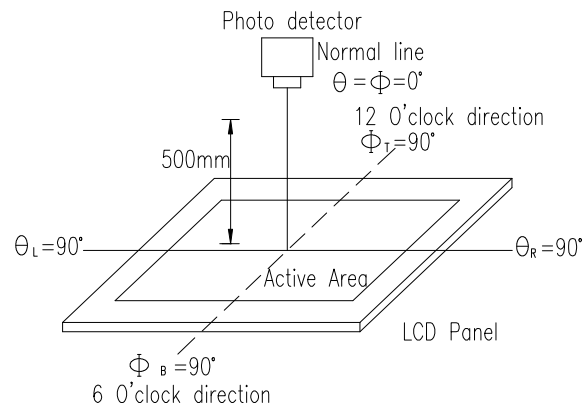


Fig.10.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

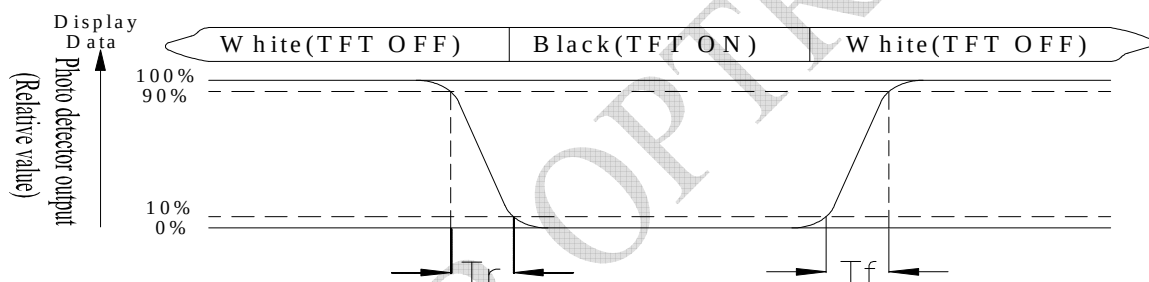

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: White $V_i = V_{i50} \pm 1.5V$

Black $V_i = V_{i50} \pm 2.0V$

"±" means that the analog input signal swings in phase with VCOM signal.

"±" means that the analog input signal swings out of phase with VCOM signal.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.


Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

11. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

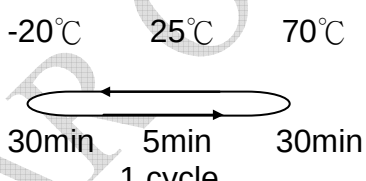Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60°C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation 	-20°C/70°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 15mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V, RS=1.5kΩ CS=100pF 1 time	—

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: Vibration test will be conducted to the product itself without putting it in a container.

12. PACKAGE SPECIFICATION

LCM Model	RFF1020Q-1IW-DBS	LCM 包裝規格書 LCM Packaging Specifications	Approve	Check	Contact
Drawing NO.			DATE	初版	版次Ver
			14/2/27	14/2/27	0

1.包裝材料規格表 (Packaging Material) :(per carton)

NO.	Item	Model	Dimensions	Quantity
1	成品 (LCM)	RFF1020Q-1IW-DBS		30
2	TRAY 盤 (2)	PKCA1XXXXXXXXXXXX0288	315*265mm	30
3	BP01 內 盒 (3)Product Box	PK3Y1XXXXXXXXXXXX0001	332*280*100mm	6
4	泡棉(4)Foam	-	-	6
5	外紙箱(5)Carton	PK4X1XXXXXXXXXXXX0000	565*340*320mm	1
6				
7				
8				
9				


2.單箱數量規格表(Packaging Specifications and Quantity) :

(1)LCM quantity per box : no per tray 1 x no of tray 5 = 5

(2)Total LCM quantity in carton : quantity per box 5 x no of boxes 6 = 30

特 記 事 項 (REMARK)

1. Label Specifications : MOOEL: LOT NO : QUANTITY: CHECK:	
---	--

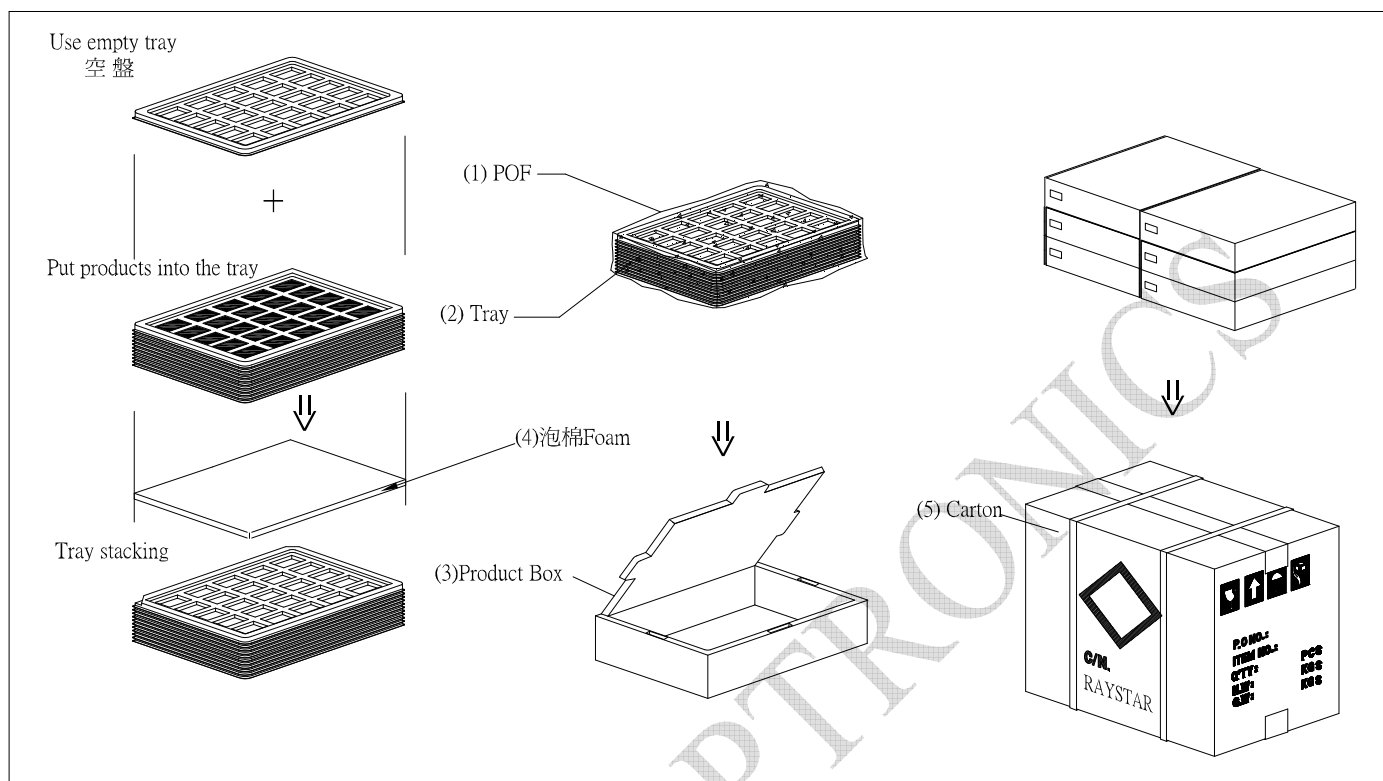

13. Initial Code For Reference

```
void Initial_SSD1963()
{
    Write_Command(0x01);
    Delay_ms(10);
    Write_Command(0xe0);    //START PLL
    Write_Parameter(0x01);
    Delay_ms(50);
    Write_Command(0xe0);    //START PLL
    Write_Parameter(0x03);
    Delay_ms(5);

    Write_Command(0xb0);
    Write_Parameter(0x08);
    Write_Parameter(0x80);
    Write_Parameter(0x03);
    Write_Parameter(0x1f);
    Write_Parameter(0x01);
    Write_Parameter(0xdf);
    Write_Parameter(0x2d);

    Write_Command(0xf0);
    Write_Parameter(0x03); //pixel data format, 0x03 is 16bit(565 format);0x00 is for 8-bit

    //Set the MN of PLL
    Write_Command(0xe2);
    Write_Parameter(0x22);
    Write_Parameter(0x03);
    Write_Parameter(0x04);

    Write_Command(0xe6);
    Write_Parameter(0x03);
    Write_Parameter(0xff);
    Write_Parameter(0xff);

    //Set front porch and back porch
    Write_Command(0xb4);
    Write_Parameter(0x04);
    Write_Parameter(0x25);
    Write_Parameter(0x00);
    Write_Parameter(0x34);
    Write_Parameter(0x05);
```

```
Write_Parameter(0x00);  
Write_Parameter(0x00);  
Write_Parameter(0x00);
```

```
Write_Command(0xb6);  
Write_Parameter(0x02);  
Write_Parameter(0x12);  
Write_Parameter(0x00);  
Write_Parameter(0x1d);  
Write_Parameter(0x05);  
Write_Parameter(0x00);  
Write_Parameter(0x00);
```

```
Write_Command(0x2a);  
Write_Parameter(0x00);  
Write_Parameter(0x00);  
Write_Parameter(0x03);  
Write_Parameter(0x1f);
```

```
Write_Command(0x2b);  
Write_Parameter(0x00);  
Write_Parameter(0x00);  
Write_Parameter(0x01);  
Write_Parameter(0xdf);
```

```
Write_Command(0xb8);  
Write_Parameter(0x0f);  
Write_Parameter(0x01);  
Write_Command(0xba);  
Write_Parameter(0x01);
```

```
Write_Command(0x29);  
Write_Command(0x2c);
```

```
}
```

LCM Sample Estimate Feedback Sheet

Module Number : _____

1、Panel Specification :

1. Panel Type :	☐ Pass	☐ NG , _____
2. View Direction :	☐ Pass	☐ NG , _____
3. Numbers of Dots :	☐ Pass	☐ NG , _____
4. View Area :	☐ Pass	☐ NG , _____
5. Active Area :	☐ Pass	☐ NG , _____
6. Operating Temperature :	☐ Pass	☐ NG , _____
7. Storage Temperature :	☐ Pass	☐ NG , _____
8. Others :	_____	

2、Mechanical Specification :

1. PCB Size :	☐ Pass	☐ NG , _____
2. Frame Size :	☐ Pass	☐ NG , _____
3. Material of Frame :	☐ Pass	☐ NG , _____
4. Connector Position :	☐ Pass	☐ NG , _____
5. Fix Hole Position :	☐ Pass	☐ NG , _____
6. Backlight Position :	☐ Pass	☐ NG , _____
7. Thickness of PCB :	☐ Pass	☐ NG , _____
8. Height of Frame to PCB :	☐ Pass	☐ NG , _____
9. Height of Module :	☐ Pass	☐ NG , _____
10. Others :	☐ Pass	☐ NG , _____

3、Relative Hole Size :

1. Pitch of Connector :	☐ Pass	☐ NG , _____
2. Hole size of Connector :	☐ Pass	☐ NG , _____
3. Mounting Hole size :	☐ Pass	☐ NG , _____
4. Mounting Hole Type :	☐ Pass	☐ NG , _____
5. Others :	☐ Pass	☐ NG , _____

4、Backlight Specification :

1. B/L Type :	☐ Pass	☐ NG , _____
2. B/L Color :	☐ Pass	☐ NG , _____
3. B/L Driving Voltage (Reference for LED Type) :	☐ Pass ☐ NG , _____	
4. B/L Driving Current :	☐ Pass	☐ NG , _____
5. Brightness of B/L :	☐ Pass	☐ NG , _____
6. B/L Solder Method :	☐ Pass	☐ NG , _____
7. Others :	☐ Pass	☐ NG , _____

>> Go to page 2 <<

Module Number : _____

5 、 Electronic Characteristics of Module :

1.Input Voltage :	☐ Pass	☐ NG , _____
2.Supply Current :	☐ Pass	☐ NG , _____
3.Driving Voltage for LCD :	☐ Pass	☐ NG , _____
4.Contrast for LCD :	☐ Pass	☐ NG , _____
5.B/L Driving Method :	☐ Pass	☐ NG , _____
6.Negative Voltage Output :	☐ Pass	☐ NG , _____
7.Interface Function :	☐ Pass	☐ NG , _____
8.LCD Uniformity :	☐ Pass	☐ NG , _____
9.ESD test :	☐ Pass	☐ NG , _____
10.Others :	☐ Pass	☐ NG , _____

6 、 Summary :
Sales signature : _____

Customer Signature : _____

Date : / /